

SPIROTECH SPECIFICATIEBLAD

Product:

elko-flex  
U300-6

Type:

EVU300-6

Datum:


14-2-2024

Klantnaam:


Project:

Referentie:

Tekening

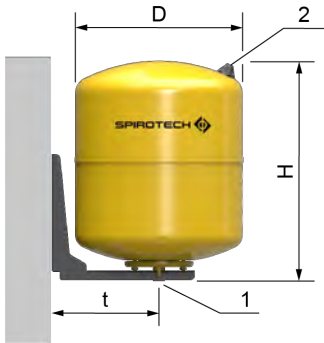

EVU6-18 .. EVU6-50

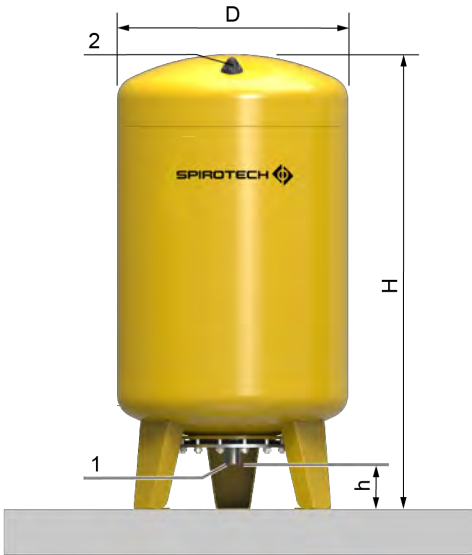

EVU6-90 .. EVU6-300

Ontwerp criteria

|                                                                    |                     |
|--------------------------------------------------------------------|---------------------|
| Tested in accordance with:                                         | PED 2014/68/EU      |
| Max. safety temperature of the system without/with cooling vessel: | 90/110 °C           |
| Minimale temperatuur:                                              | 0 °C                |
| Maximale temperatuur:                                              | 70 °C               |
| Maximale systeemdruk:                                              | 6 bar-g             |
| Permissible medium:                                                | Water, Water/Glycol |
| Kleur:                                                             | RAL 1003            |

Afmetingen

|                        |                    |
|------------------------|--------------------|
| D:                     | 600 mm             |
| H:                     | 1400 mm            |
| h:                     | 85 mm              |
| t:                     | 85 mm              |
| Connection             | R1                 |
| 1                      | Expansion pipe     |
| 2                      | Gas pressure valve |
| Volume:                | 300 ltr            |
| Ledig gewicht (circa): | 81,4 kg            |

Wijzigingen voorbehouden